

► Our technology. Your success.

Pumps • Valves • Service



KSB Delta Solo – Pressure boosting unit



KSB Delta Solo SVP



Applications:

- Pressure boosting
- Water supply
- Irrigation

More information:

www.ksb.com/products



KSB Delta Solo MVP

KSB Delta Solo – Pressure boosting unit



1 Energy-efficient

IE5 SuPreme reluctance motors.

2 Suitable for drinking water

- Drinking water certificate ACS and WRAS.
- DVGW approved valves and non-return-valve

3 100% flush through

- No hydraulic dead spots
- Legionella safe

4 Innovative

- New design non-return-valve
- O-ring sealing

5 Space-saving

Very compact design.


6 Service friendly

Easy accessibility.

Technical data

Flow rate	Up to 21.8 m³/h / 6.1 l/s
Head	134 m
Fluid temperature	0 to +60 °C
Operating pressure	up to 16 bar
Inlet pressure	up to 4 bar

Characteristic curves

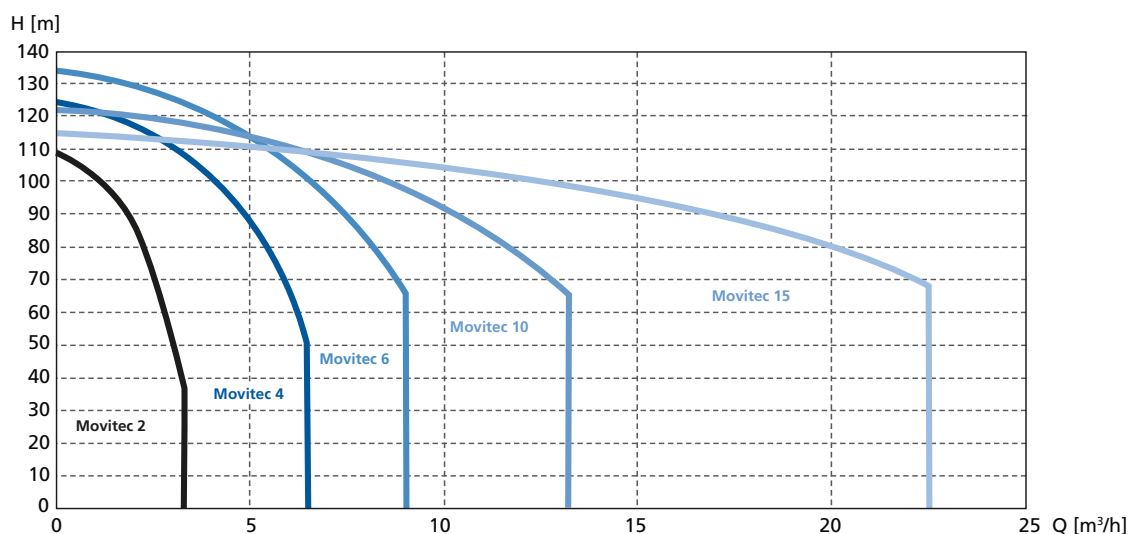

KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com