



# SaniForce™

A Complete Sanitary Pump Line




PROVEN QUALITY. LEADING TECHNOLOGY.

## POWERFUL ADVANCED TECHNOLOGY

The new SaniForce line **saves you time and money** by pumping the most difficult materials – quickly and safely!

### SaniForce Pumps:

- Air-operated double diaphragm pumps
- Piston transfer pumps
- Drum and bin unloaders
- High pressure cleaning equipment

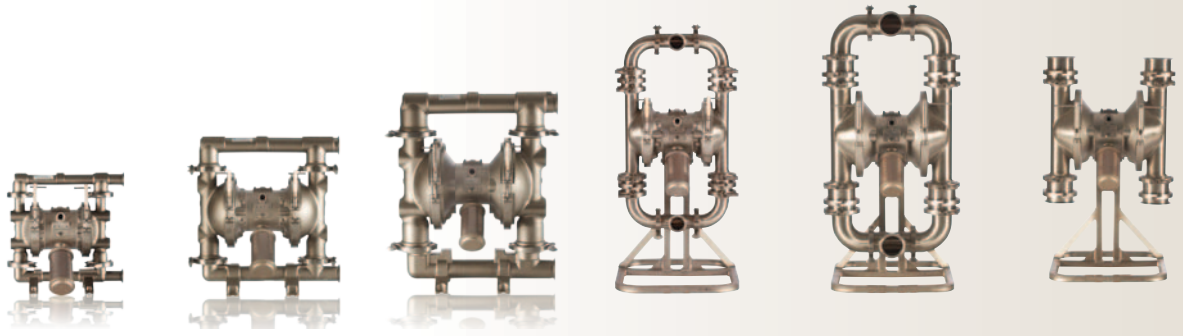

Model	1040	1590	2150	1590 HS & 3-A	3150 HS & 3-A	Meat/Poultry
Max Flow Rate	151 l/min (40 gpm)	340 l/min (90 gpm)	568 l/min (150 gpm)	340 l/min (90 gpm)	568 l/min (150 gpm)	568 l/min (150 gpm)
Max Fluid Pressure	8 bar (0.8 MPa, 120 psi)	8 bar (0.8 MPa, 120 psi)	8 bar (0.8 MPa, 120 psi)	8 bar (0.8 MPa, 120 psi)	8 bar (0.8 MPa, 120 psi)	8 bar (0.8 MPa, 120 psi)
Pump Style	Ball	Ball	Ball	Ball	Ball or Flapper	Flapper
Suction Lift (Wet)	8.84 m (29 ft)	8.84 m (29 ft)	8.84 m (29 ft)	8.5 m (28 ft)	Ball = 5.5 m (18 ft) Flapper = 3 m (10 ft)	3 m (10 ft)
Max Pumpable Solids	3.2 mm (1/8")	4.8 mm (3/16")	6.3 mm (1/4")	15.9 mm (5/8")	Ball = 25.4 mm (1") Flapper = 63.5 mm (2.5")	63.5 mm (2.5")
Viscosity Range	Up to 10,000 cps	Up to 15,000 cps	Up to 20,000 cps	Up to 15,000 cps	Up to 20,000 cps	Up to 25,000 cps
Leaflet	320462	320462	320462	338499	338499	338067
Manual	311879	311879	311879	310622	310622	310622


# A Smart Alternative to Hand-mixing



Transfer a **broad range of viscosities** from fruit juices and pizza sauce to caramel and peanut butter.

## SaniForce Pumps and Unloaders:

- Move material faster
- Increase efficiency
- Improve processes
- Pump high viscosity materials

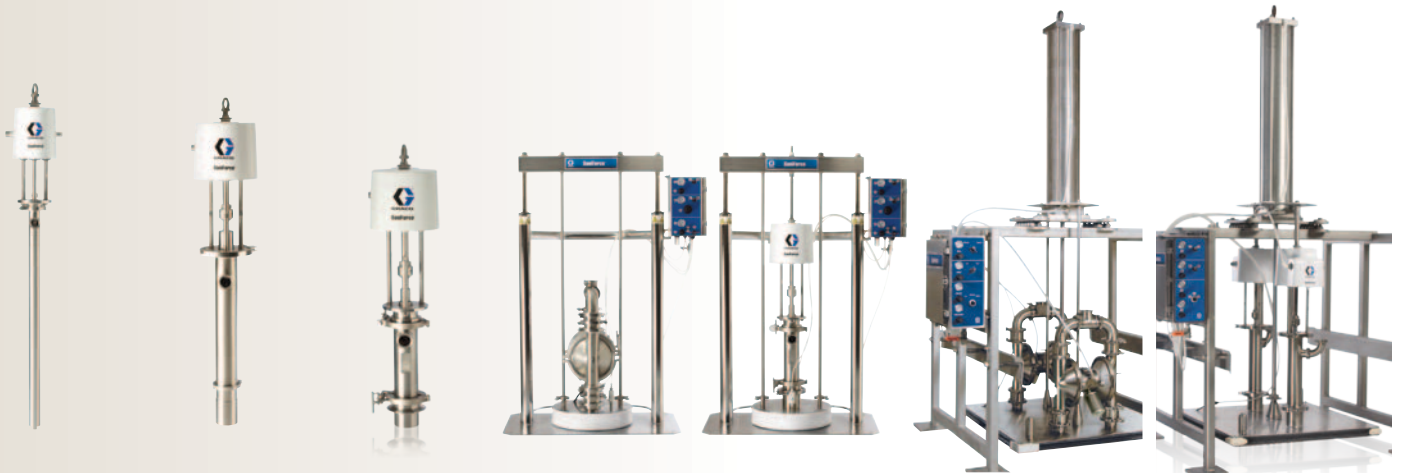

6:1	5:1	12:1	Diaphragm Drum Unloaders	Piston Drum Unloaders	Diaphragm Bin Evacuation	Piston Bin Evacuation
15 l/min (4 gpm)	53 l/min (14 gpm)	32 l/min (8.5 gpm)	340 to 568 l/min (90 to 150 gpm)	15 to 53 l/min (4 to 14 gpm)	1,135 l/min (300 gpm)	56 to 212 l/min (12 to 64 gpm)
41 bar (4.1 MPa, 600 psi)	28 bar (2.8 MPa, 400 psi)	83 bar (8.3 MPa, 1200 psi)	8 bar (0.8 MPa, 120 psi)	83 bar (8.3 MPa, 1200 psi)	8 bar (0.8 MPa, 120 psi)	83 bar (8.3 MPa, 1200 psi)
Double ball Priming piston	Double ball Priming piston	Priming piston	Ball or Flapper	Double ball or Priming piston	Ball or Flapper	Double ball or Priming piston
N/A	N/A	N/A	N/A	N/A	N/A	N/A
3.2 mm (1/8")	6.4 mm (1/4")	6.4 mm (1/4")	Ball = 25.4 mm (1") Flapper = 63.5 mm (2.5")	3.2 to 6.4 mm (1/8" to 1/4")	Ball = 25.4 mm (1") Flapper = 63.5 mm (2.5")	6.4 mm (1/4")
Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	25,000 to 100,000 cps	25,000 to 500,000 cps	25,000 to 100,000 cps	25,000 to 500,000 cps
338591	338591	338591	338590	338590	338589	338589
3A0733	3A0734	3A0735	3A0591	3A0591	311163	311163

# SaniForce™ Piston Pumps

## Save money by increasing efficiency

Graco's powerful line of piston pumps move extremely difficult materials. They have pressure ratios up to 12:1 and are ideal for low to medium viscosity materials.

The air motors improve serviceability, increase efficiency and offer a lower cost of ownership. The quick knockdown lowers are made with 300 series stainless steel for long-lasting durability.



**SaniForce 6:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 15 l/min (4 gpm)
- Lowers available in both stubby and drum lengths

**SaniForce 5:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 53 l/min (14 gpm)
- Lowers available in both stubby and drum lengths


**SaniForce 12:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 32 l/min (8.5 gpm)
- **New quick knockdown design**

<b>Common Applications</b>	Fluid transfer and supply of low to medium viscosity fluids
	Food-related applications
	Cosmetic and pharmaceutical applications

<b>Common Materials</b>	Fruit juice concentrates
	Cream candy fillings
	Ice cream variegates
	Cosmetics

# Move the most difficult materials

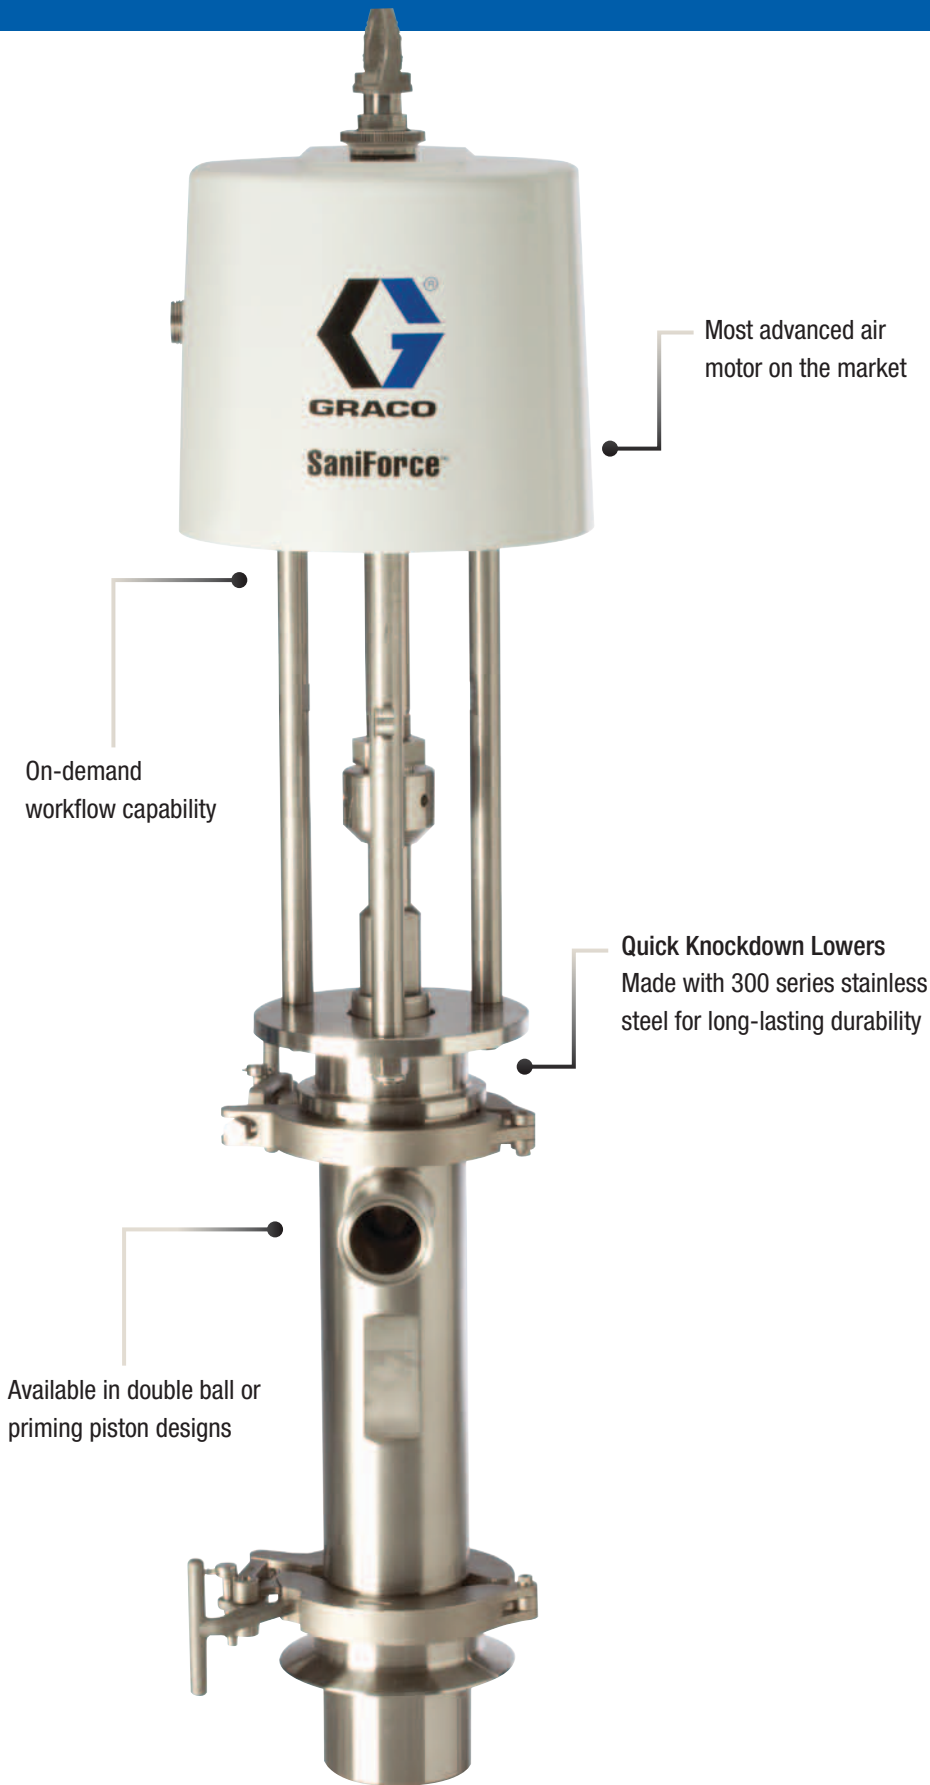

## FDA-Compliant Kydex® Shroud

- Easily removable to clean and access modular air valve – reducing downtime



**All SaniForce Piston Pumps have Quick Knockdown Lowers for Fast and Easy Cleaning!**

# SaniForce™ 1040 - 1590 - 2150

## Graco pumps excel!

Graco's SaniForce 1040, 1590 and 2150 air-operated diaphragm pumps not only have very high **flow rates**, but have one of the **best, most durable, lube-free air valves** in the industry.

Ideal for applications requiring high flow rates and portability, Graco's dependable diaphragm pumps offer a wide range of food-grade elastomers including Santoprene, PTFE, and overmolded EPDM/PTFE.

### Pump Finish

- Cast 316 SST
- Sanitary shot-blasted wetted sections with 125 Ra finish

Bolt-through and overmolded diaphragm options available

Fluid contact areas are all FDA-compliant and meet CFR Title 21




**2150**

- 63.5 mm (2.5") tri-clamp connections
- Flow rates of 568 l/min (150 gpm)



**1590**

- 50 mm (2.0") tri-clamp connections
- Flow rates up to 340 l/min (90 gpm)



**1040**

- 38 mm (1.5") tri-clamp connections
- Flow rates of 151 l/min (40 gpm)

### Common Applications

- Evacuation of food to mixing kettles
- Transferring from original containers to mixing tanks
- High volume evacuation of liquid concentrates from holding vessels
- Repackaging of fluids from original containers to smaller receptacles
- Feed filling/packaging stations

### Common Materials


- Concentrated fruit juices
- Sauces, pastes and starches
- Wine
- Jams and jellies
- Oils

DIAPHRAGM PUMPS

# Improve your process and reduce downtime

Graco Air Valves  
are  **durable, reliable  
and easy to repair!**

- Increase durability and reduce repair time with fewer moving parts
- Three-way pilot valve for non-stick operation
- Externally serviceable for quick, inexpensive repairs

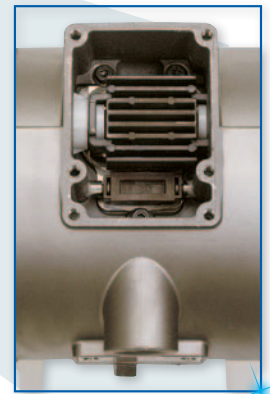

Tri-clamp inlet and outlet connections

## Stop Harboring Bacteria!

Graco overmolded the diaphragm plate with PTFE on the fluid side and EPDM on the air side on our **PTFE/EPDM diaphragms** so there is no place to harbor bacteria. This improves wear, durability and cleanability –making SaniForce diaphragm pumps very **easy to clean**.


- Improve wear and diaphragm life with no exposed diaphragm plate on the fluid side
- Longer diaphragm life in abrasive applications that still require PTFE
- Available on the SaniForce 1040, 1590, 2150 and SaniForce 1590 HS and 3150 HS



# SaniForce™ 1590 and 3150 High Sanitation

## Easy to clean, quick knockdown design

Graco's SaniForce High Sanitation (HS) pumps are ideal for applications that require an electropolished 32 Ra finish and benefit from the convenience of a quick knockdown design. All models are FDA-compliant and can be disassembled in five minutes or less.

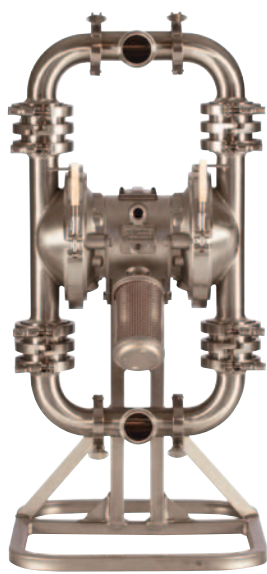

**1590 HS**

- 50.8 mm (2.0") tri-clamp connections
- Flow rates up to 340 l/min (90 gpm)



**3150 HS**

- Up to 101.6 mm (4.0") tri-clamp connections
- Flow rates up to 568 l/min (150 gpm)

32 Ra formed/welded stainless steel with sanitary finish

Flow rates ranging from 340-568 l/min (90-150 gpm)

Patented, durable, lube-free air valve


Interchangeable flapper and ball check

SANITARY

<b>Common Applications</b>	Evacuation of food to mixing kettles
	Transferring from original containers to mixing tanks
	High volume evacuation of liquid concentrates from holding vessels
	Repackaging of fluids from original containers to smaller receptacles

<b>Common Materials</b>	Fruit filling
	Spaghetti sauce
	Muffin and cake batter
	Grapes with and without stems
	Potato salad
	Cultured dairy products

# Designed for Easy Cleaning

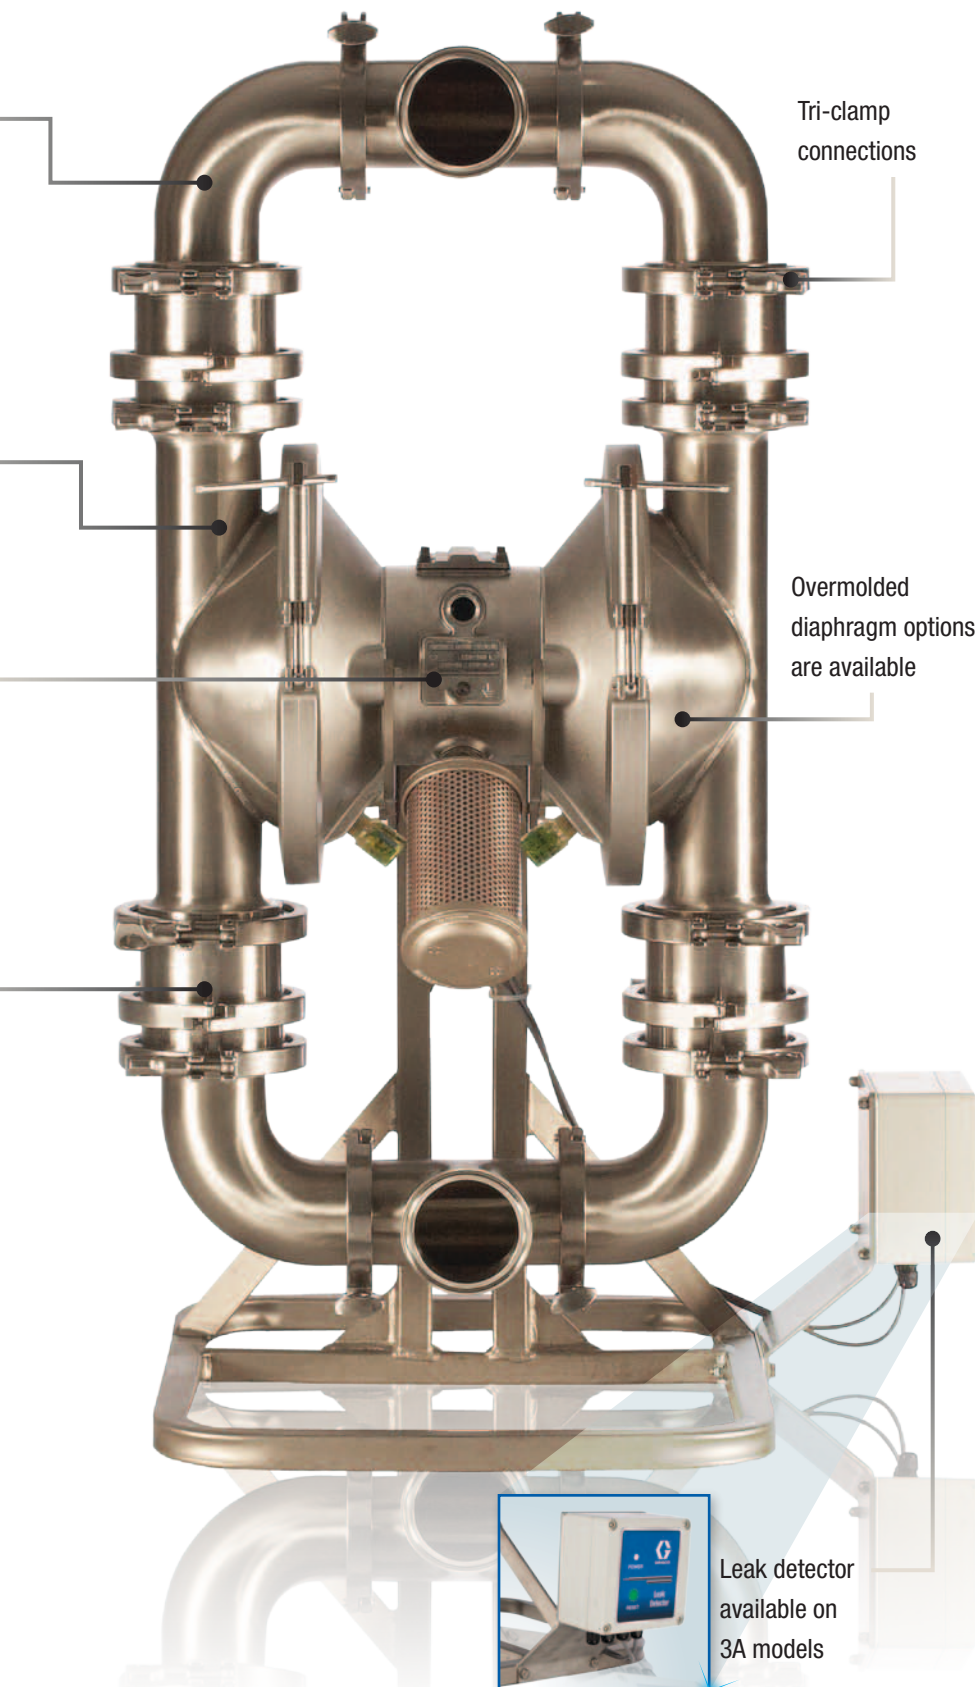

## EPDM Overmolded Diaphragms

- Approved for 3A applications
- Easy cleaning with smooth, flat surfaces and no recessed areas
- No exposed diaphragm plates to prevent contaminant collection



## Meat and Poultry Pump

The SaniForce Meat and Poultry Flapper pump handles solids up to 6.3 cm (2.5 inches) in diameter and features Graco's durable, non-sticking air valve. Easily passes necks, gizzards, livers, hearts, feet and slurries.




<b>Common Applications</b>	Meat processing
	Poultry processing
	Pet food manufacturers
	Batters

# SaniForce™ Drum Unloaders

Need to transfer 500,000 cps materials? No problem!

Graco's SaniForce drum unloaders can evacuate medium to high viscosity products from their original 208 liter (55-gallon) containers, in less than 5 minutes – without diluting the material.

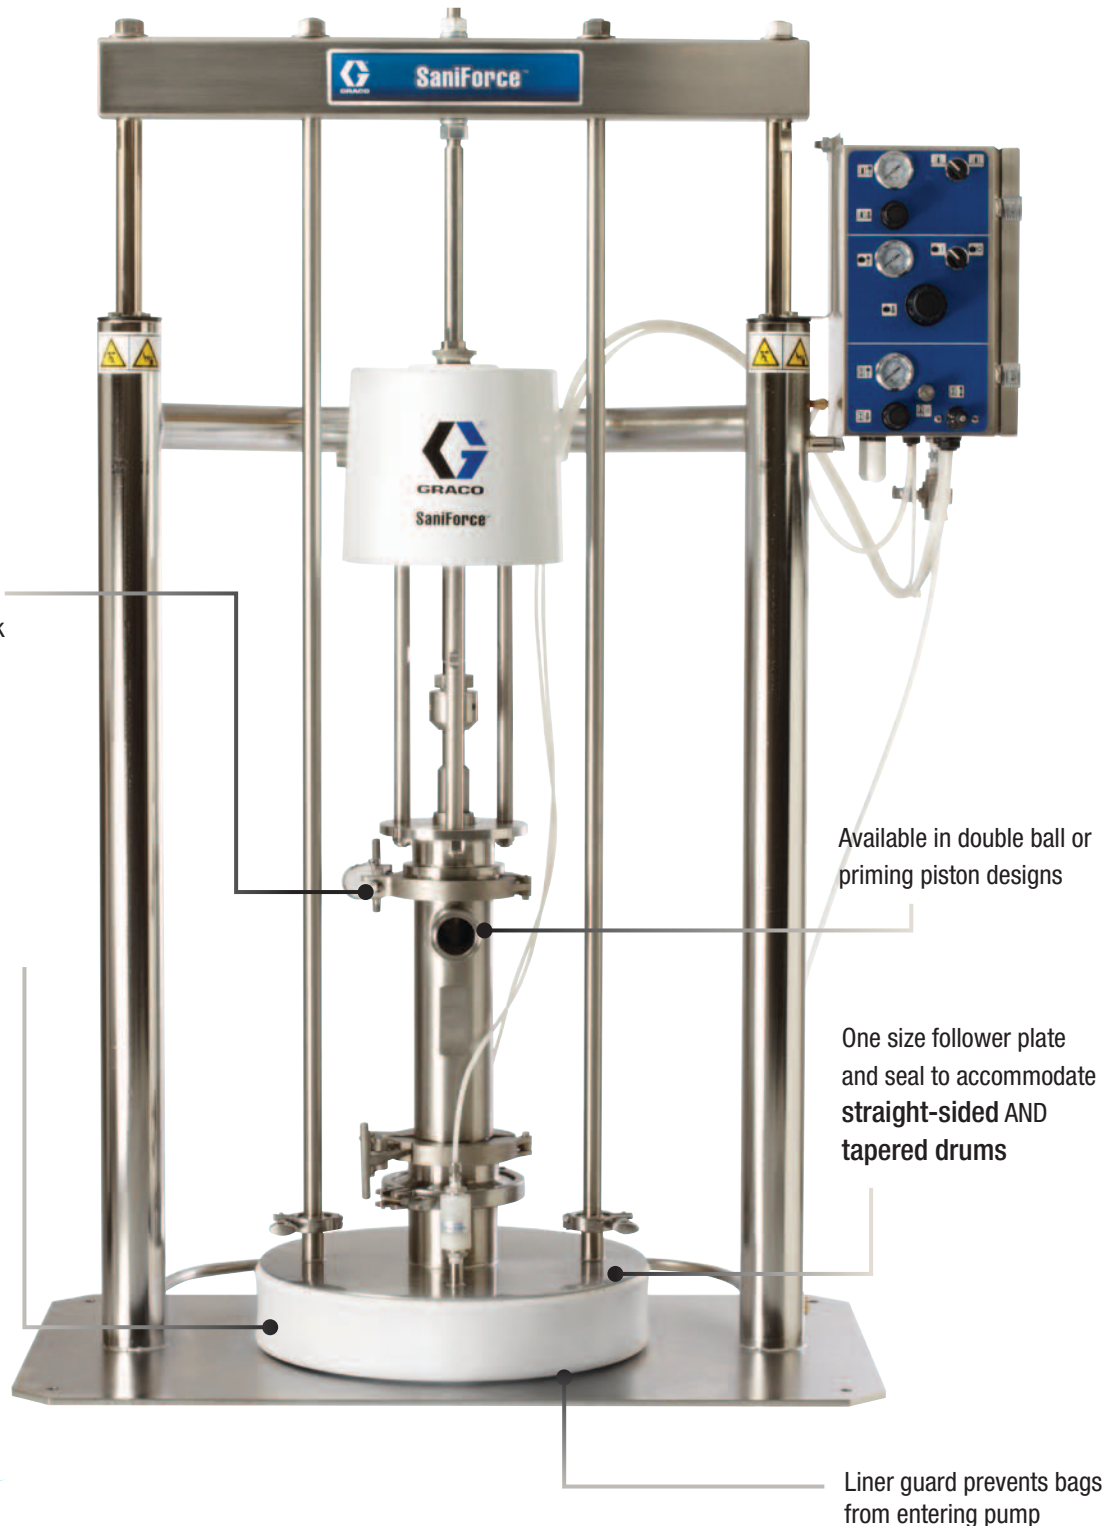

## Wiper Seal Features

- FDA-compliant inflatable ram plate seal
- Faster change-out of empty containers
- 99% evacuation rate




# Configure your own SaniForce Drum Unloading System

It's as easy as 1-2-3.

Choose the Ram Frame Material + Control Type + Pump Type to build your own SaniForce Drum Unloading System.

**1**

Ram Frame Material

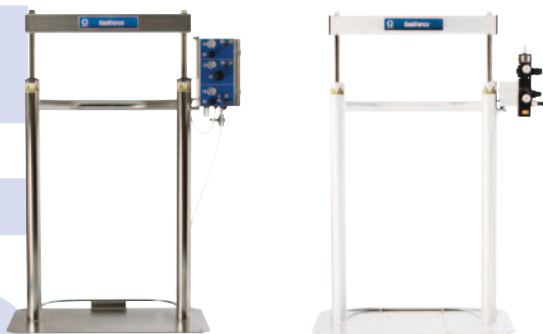

300 Series Stainless Steel OR Painted Carbon Steel

**2**

Controls Type



Enclosed Controls\* OR Exposed Controls

\*Available with SST frame only

**3**

SaniForce Piston Pump

OR SaniForce Diaphragm Pump



SaniForce 6:1

SaniForce 5:1

SaniForce 12:1

SaniForce 2150

SaniForce 3150 HS

All pumps feature an on-demand workflow capability and can also be taken apart quickly for applications that require frequent sanitation.

**Common Applications**

Unload medium to high viscosity products, up to 500,000 cps, from 208 liter (55-gallon) containers without diluting the material

**Common Materials**

Tomato paste	Cosmetics
Peanut butter	Jams and jellies
Icing and frosting	Caramel
Toothpaste	Corn syrup

# SaniForce™ Bin Evacuation Systems (BES)

The **most sanitary way** to unload materials without introducing airborne bacteria!

Save time and money in your facility by unloading materials efficiently from 1135 liter (300-gallon) “bag-in-bin” containers – eliminating manual scooping or bin dumping.

Complete bin unloading saves water evaporation costs and provides better process control while removing the need for costly booster pumps. Flow rates up to 400 l/min (100 gpm) can easily be achieved on medium to high viscosity products up to 500,000 cps.

EVA  
CUA  
TION



**SaniForce 3150 BES  
with Diaphragm Pumps**




**SaniForce BES  
with Piston Pumps**

<b>Common Applications</b>	Evacuate viscous products from their original 1135 liter (300-gallon) containers without dilution
----------------------------	---

<b>Common Materials</b>	Tomato paste	Cosmetics
	Peanut butter	Jams and jellies
	Icing and frosting	Caramel
	Toothpaste	Corn syrup

# Unload a Tote in 5 min. or less!

Keep your product clean,  
**move it quickly** and boost  
your bottom line with a  
SaniForce bin evacuation system.

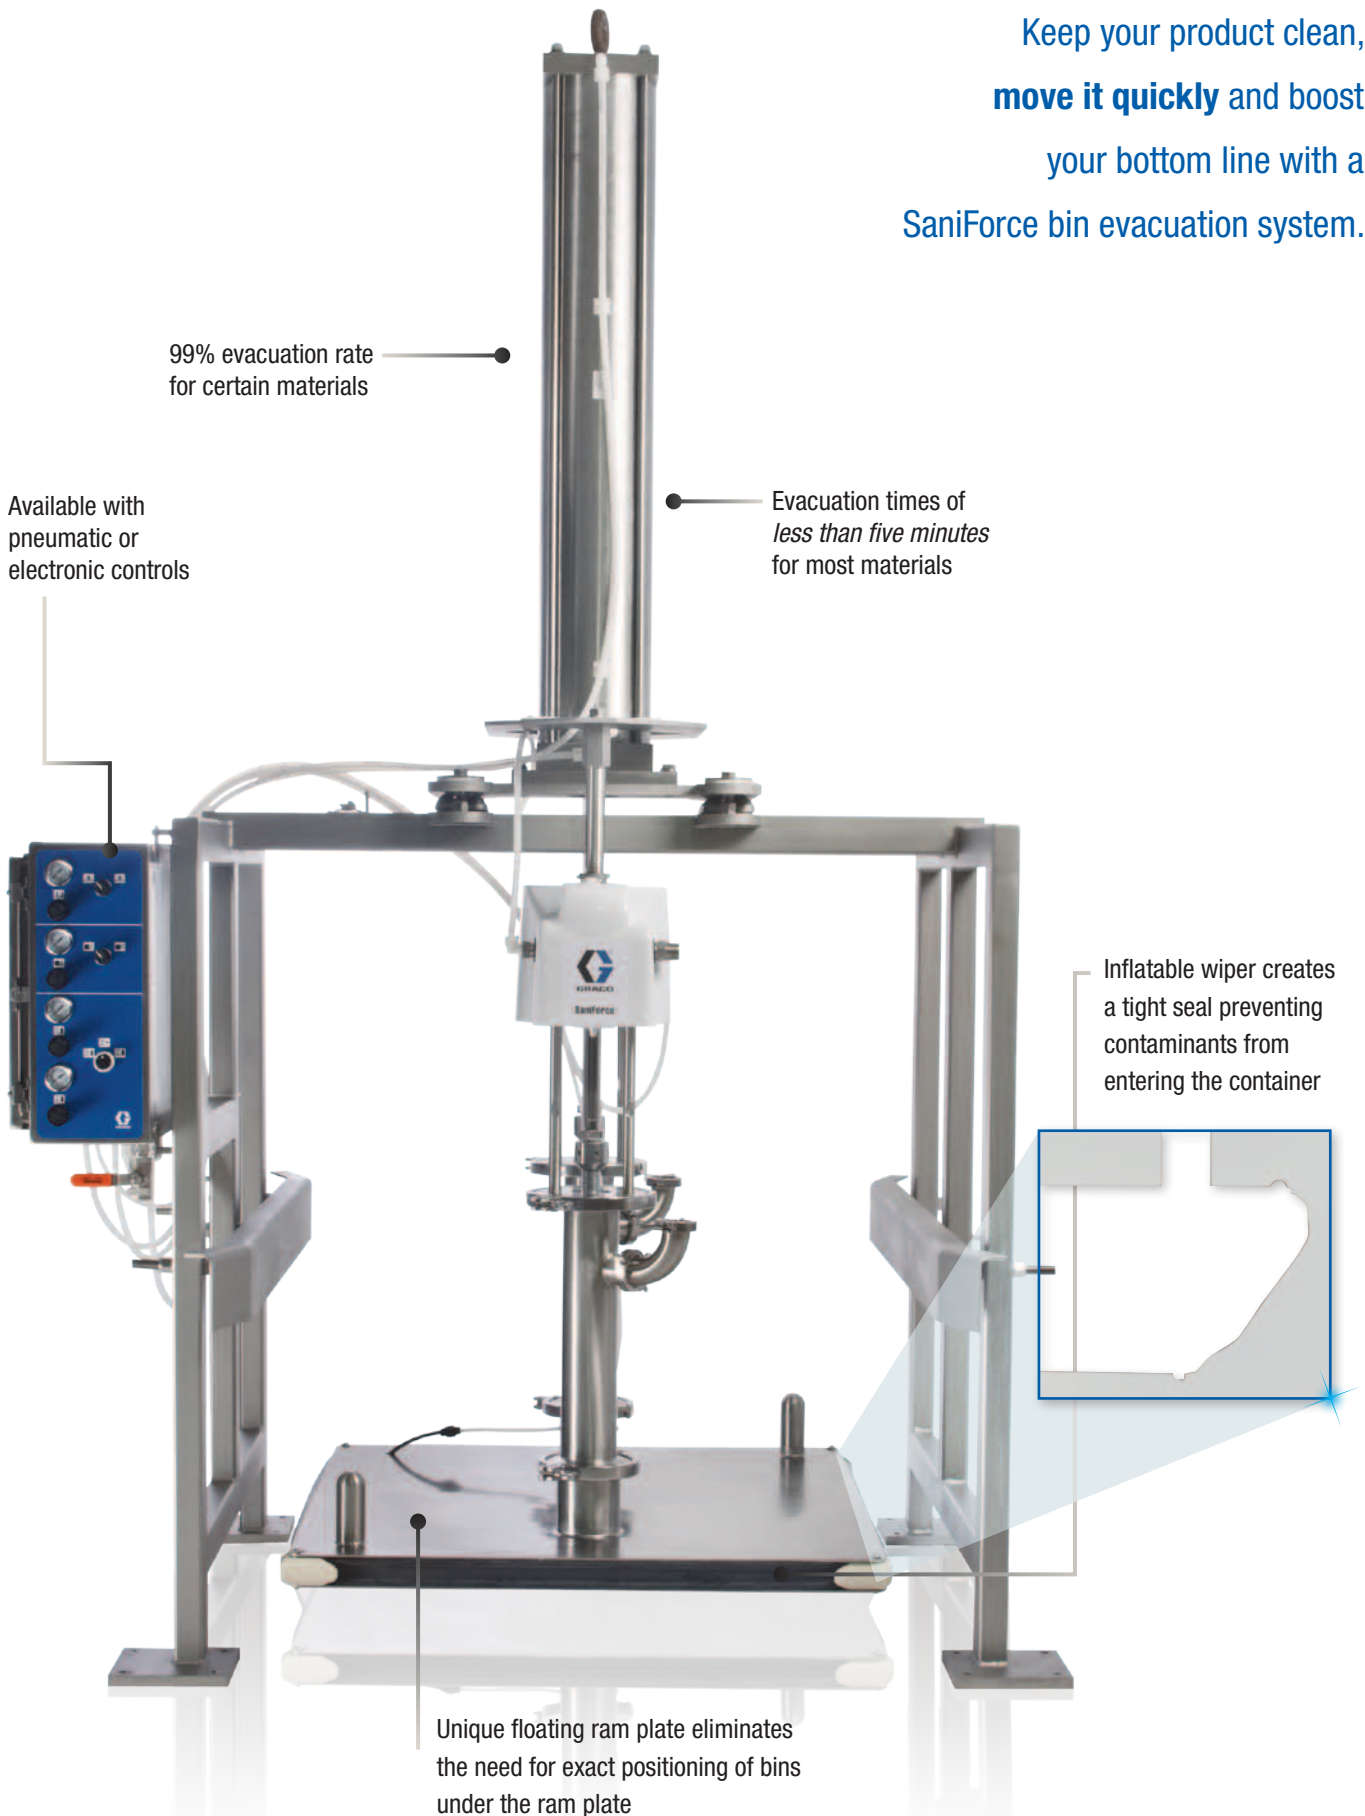

# Hydra-Clean® Pressure Washers

Gas and electric can't be used? Choose the **air-driven** Hydra-Clean pressure washer for your cleaning solution.

Ideal for cleaning and sanitizing food, beverage and pharmaceutical processing facilities, Hydra-Clean pressure washers can be used with hot or cold water, detergents or strong chemical solutions up to 93°C (200°F).



Available in both wall-mount and cart-mount

Ideal for use with open-head drums

300 series stainless steel lower is compatible with many extreme chemicals

Supports multiple guns

Each package comes standard with five different spray tips

# A complete line of Chemical Transfer Pumps

With its patented air valve, Graco pumps are a **dependable, easy-to-service** solution for CIP application requirements.



**Husky™ 205 Polypropylene**

- 6.3 mm (1/4") connection
- Max flow: 19 l/min (5 gpm)



**Husky 205 PVDF**

- 6.3 mm (1/4") connection
- Max flow: 19 l/min (5 gpm)



**Husky 307 Polypropylene**

- 9.4 mm (3/8") connection
- Max flow: 26 l/min (7 gpm)



**Husky 515 Polypropylene**

- 12.7 mm (1/2") connection
- Max flow: 57 l/min (15 gpm)



**Husky 515 PVDF**

- 12.7 mm (1/2") connection
- Max flow: 57 l/min (15 gpm)



**Husky 716 SST**

- 19.1 mm (3/4") connection
- Max flow: 61 l/min (16 gpm)



**Husky 1050 Polypropylene**

- 25.4 mm (1") connection
- Max flow: 189 l/min (50 gpm)



**Husky 1050 PVDF**

- 25.4 mm (1") connection
- Max flow: 189 l/min (50 gpm)



**Husky 1050 SST**

- 25.4 mm (1") connection
- Max flow: 189 l/min (50 gpm)

GRACO PUMPS



## ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000  
Fax: 612-623-6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Headquarters  
Graco N.V.  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700  
Fax: 32 89 770 777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500  
Fax: 61 3 9468 8599

#### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Room 118 1st Floor  
No.2 Xin Yuan Building  
No.509 Cao Bao Road  
Shanghai, 200233  
The People's Republic of China  
Tel: 86 21 649 50088  
Fax: 86 21 649 50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 432, Augusta Point  
Regus Business Centre 53  
Golf Course Road  
Gurgaon, Haryana  
India 122001  
Tel: 91 124 435 4208  
Fax: 91 124 435 4001

#### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300  
Fax: 81 45 593 7301

#### KOREA

Graco Korea Inc.  
Shinhan Bank Building  
4th Floor #1599  
Gwangyang-Dong, Dongan-Ku,  
Anyang-si, Korea 431-060  
Tel: 82 31 476 9400  
Fax: 82 31 476 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe  
+32 89 770 700  
FAX +32 89 770 777  
WWW.GRACO.COM